

AC LED Factory Light (HR series)



01 Features



- Direct AC LED Module
- No SMPS
- High efficiency (Typ. 120 lm/W)
- Non-waterproof type
- Weight lightening
- Easy to install
- Save Electricity bill due to long life
- Power Factor $\geq 98\%$
- Installation type (Chain)


02 Product specifications

Model	HR-100	HR-150	HR-180
Power consumption	100 W	150 W	180 W
Input voltage	220 Vac		
Light Efficiency	Typ. 120 lm/W	Typ. 115 lm/W	Typ. 115 lm/W
CRI	Ra 80		
CCT	5,700 K		
Weight	2.1 kg	2.1 kg	2.1 kg
IP code	N/A		
SPD	N/A		
Beam Angle	120°	120°	120°
Size (L x W x H mm)	Ø365 x 280		
Certification	KC	KC	KC




03 Illuminance Cone Diagram

Unit : lx


Watt	Distance				
	3m	4m	5m	6m	7m
100W	410	230	150	100	76
150W	590	330	210	150	110
180W	710	400	260	180	130

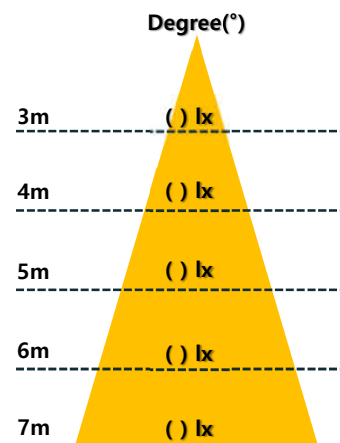

04 Dimension



05 Light distribution curve

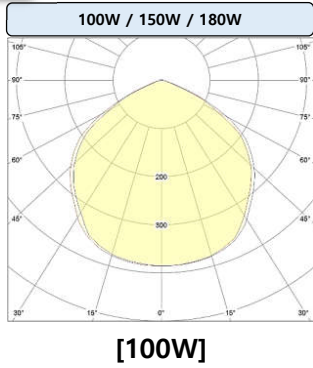

06 Reference



Factory, Namdong-gu



Factory, Namdong-gu



Factory, Namdong-gu



Gas station, Honduras



Factory, Mexico



Factory, Indonesia



VIoT Technology Joint Stock Company

33 Hoang Dieu St., Ward 10, Phu Nhuan District, Ho Chi Minh City, Viet Nam

Tel: +84 93333 27 27

sales@viotgroup.com | www.viotgroup.com
